
SKYJACK SJIII 4632

DC ELECTRIC SCISSOR LIFT



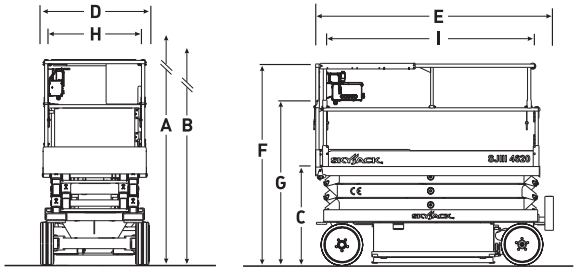

STANDARD FEATURES

- Drivable at full height
- 24 V DC power source
- 1.2 m roll-out extension deck
- Proportional drive and lift controls
- Solid rubber non-marking tyres
- Pothole protection and overload sensing

TECHNICAL DATA - SJIII 4632	
Working height	**11.8 m**
Raised platform height	**9.8 m**
Lowered platform height	**1.2 m**
Overall width	**1.2 m**
Overall length	**2.3 m**
Stowed height - rails up	**2.2 m**
Stowed height - rails down	**1.9 m**
Platform width - inside	**1.1 m**
Platform length - inside	**2.1 m**
Roll-out extension deck	**1.2 m**
Ground clearance - stowed	**8.9 cm**
Ground clearance - raised	**1.9 cm**
Wheelbase	**1.8 m**
Weight	**2,302 kg**
Gradeability	**25%**
Turning radius - inside	**1.2 m**
Turning radius - outside	**2.4 m**
Lift time - rated load	**59 seconds**
Drive speed - stowed	**3.2 km/h**
Drive speed - raised	**1 km/h**
Maximum drive height	**Full height**
Overall capacity	**318 kg**
Maximum persons	**2**

Source: supplied Skyjack CE brochure, printed August 2008.

Forklift Truck Depot Limited
Buy It | Rent It | Lift It - We've Got the Solution
ACCESS EQUIPMENT HIRE
01226 281673
info@forklifttruckdepot.com